

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problems Mailbox.**

**THIS PAGE BLANK (USPTO)**



THE UNITED STATES PATENT AND TRADEMARK OFFICE  
PATENT TRANSMITTAL FORM

Applicant: Johan Scott  
Serial No.: 09/886,419  
Filed: June 21, 2001  
For: METHOD OF SELECTING AN OBJECT  
Examiner: Not Yet Assigned  
Art Unit: Not Yet Assigned  
Attorney Docket: 876.0003USU

COMMISSIONER FOR PATENTS  
Washington, D.C. 20231

Dear Sir:

Transmitted herewith is:

1. Submission of Priority Document;
2. Transmittal letter in duplicate;
3. Postcard.

Please charge any additional fees or credit any such fees, if necessary to Deposit Account No. 01-0467 in the name of Ohlandt, Greeley, Ruggiero & Perle. A duplicate copy of this sheet is attached.

Respectfully submitted,

Date: August 17, 2001

Paul D. Greeley  
Reg. No. 31,019  
Ohlandt, Greeley, Ruggiero & Perle, L.L.P.  
One Landmark Square, 10th Floor  
Stamford, Connecticut 06901-2682  
(203) 327-4500

CERTIFICATE OF MAILING

I HEREBY CERTIFY THAT THIS CORRESPONDENCE IS BEING DEPOSITED WITH THE U.S. POSTAL SERVICE AS FIRST CLASS MAIL IN AN ENVELOPE ADDRESSED TO: COMMISSIONER FOR PATENTS, WASHINGTON, D.C. 20231, ON August 17, 2001.

Heather A. Fiorella  
NAME OF PERSON MAILING PAPER

  
SIGNATURE

08/17/01  
DATE

**THIS PAGE BLANK (USPTO)**



THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Johan Scott  
Serial No.: 09/886,419  
Filed: June 21, 2001  
For: METHOD OF SELECTING AN OBJECT  
Examiner: Not Yet Assigned  
Art Unit: Not Yet Assigned  
Attorney Docket: 876.0003USU

COMMISSIONER FOR PATENTS  
Washington, D.C. 20231

**SUBMISSION OF PRIORITY DOCUMENT**

Dear Sir:

We are enclosing a certified copy of the priority document, United Kingdom Application No. 0016154.7 filed 30 June 2000, for filing in the above noted application.

It is respectfully requested that this application be passed to allowance.

Respectfully submitted,

Date: August 17, 2001

Paul D. Greeley  
Ohlandt, Greeley, Ruggiero & Perle, L.L.P.  
Attorney for Applicant  
Registration No. 31,019  
One Landmark Square, 10th Floor  
Stamford, Connecticut 06901-2682  
Telephone: (203) 327-4500  
Telefax: (203) 327-6401

**THIS PAGE BLANK (USPTO)**



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

05 JUL 2001

**THIS PAGE BLANK (USPTO)**



Patents Form 1/77

Patents Act 1977  
(Rule 16)

The  
Patent  
Office

1/77

7/77


9/77 - £ 130 + £ 15

03JUL00 5549564-12 002094  
P01/7700 0.00-0016154.7

1/77

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH



1. Your reference 03 35790

2. Patent application number 30 JUN 2000 0016154.7

3. Full name, address and post code of the or each applicant Nokia Corporation  
Keilalahdentie 4  
02150 Espoo  
Finland

Patents ADP number

If the applicant is a corporate body, give the country/state of its incorporation Finland

7652217001

4. Title of the invention Method of Selecting an Object

5. Name of your agent VENNER, SHIPLEY & CO

"Address for service" in the United Kingdom to which all correspondence should be sent

20 LITTLE BRITAIN  
LONDON  
EC1A 7DH

Patents ADP 1669004

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or each of these earlier applications and the or each application number

Country	Priority application number	Date of filing
---------	-----------------------------	----------------

7. If this application is divided or otherwise derived from an earlier UK application, give the number and filing date of the earlier application

Number of earlier application	Date of Filing
-------------------------------	----------------

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'YES' if:  
a) any applicant in 3. above is not an inventor, or  
b) there is an inventor who is not named as an applicant, or  
c) any named applicant is a corporate body)

YES

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 16

Claim(s) 4

Abstract 1

Drawing(s) 9

10. If you are also filing any of the following state how many against each item.

Priority documents —

Translations of priority documents —

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*) one

Request for preliminary examination and search (*Patents Form 9/77*) one

Request for substantive examination (*Patents Form 10/77*) —

Any other documents —

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

*Venner, Shirley*

30 June 2000

12. Name and daytime telephone number of person to contact in the United Kingdom

MATTHEW READ  
020 7600 4212

## Method of selecting an object

00000000

### Description

The present invention relates to a method of selecting an object.

A number of electronic devices have graphical user interfaces (GUIs). Such devices  
5 include, for example, personal computers (PCs), television sets and mobile  
telephones handsets. The user may interact with the device via the GUI using a  
user interface, for instance a touch sensitive pad, a keyboard, a mouse, a joystick or  
a remote control. Many factors determine the most appropriate choice of user  
interface for a device, such as ease and speed of operation and the environment in  
10 which the device is used. The use of a mouse is suited to the selection of icons  
when using a desk-top personal computer, however it is not so useful when used to  
make selections when using a digital television set. For this, a remote control unit  
having several keys is most convenient.

However, there are problems with using a key- or button- based control units as will  
15 now be explained with reference to digital television.

Digital television provides a variety of new services as compared with analogue  
television. It allows the user to transmit and receive signals via a set-top box and to  
interact with service providers. The user may now access the Internet in a similar  
way that is already available on a PC. For example, a user may navigate web pages  
20 by selecting hypertext links. The process of selecting a particular link involves  
moving a focus between links and activating a selection. In a PC-based system, this  
process is realised by positioning a mouse pointer over the link and pressing the  
mouse button. To indicate that the focus has moved to the link, the shape of the  
mouse pointer changes or the link is highlighted, for instance by changing colour or  
25 displaying a box around it.

The set-top box/television set system is often controlled using a remote control  
unit similar to that used with an existing analogue television. The remote control is

usually provided with a set of dual-state arrow keys -up, down, right, left- allowing orthogonal movement about a menu or screen.

However, the remote control unit is not particularly suited to the selection of links in a web page using a pointer because it has fewer degrees of freedom than a mouse.

5 Links may be positioned in such a way that the quickest way to reach them is by going diagonally across a viewing window. Furthermore, links may be sparsely separated and so repeated pressing of the keys is required to reach a link.

Moreover, the web page may be larger than the viewing window and so links may be located outside the viewing window.

10 The present invention seeks to solve these problems.

According to the present invention there is provided a method of selecting an object by controlling movement of a focus on a graphical display using an input device, the method comprising: supplying a signal from said input device; providing a set of acceleration data in dependence upon said signal; determining a position of  
15 the focus on the graphical display as a function of said data and displaying the focus at said position.

The method may further comprise determining an acceleration of the focus as a function of the data and determining a velocity of the focus in dependence upon the acceleration.

20 The method may further comprise determining in dependence upon the direction of motion of said focus whether said object is the intended destination of said focus and highlighting said object for selection. The determining may comprise defining a metric system.

The method may further comprise updating the acceleration using some or all of the  
25 data, updating the velocity and position of the focus and displaying the focus at the updated position. The method may further comprise determining whether the velocity of the focus exceeds a predefined maximum and if it does, limiting the velocity.

The supplying of a signal may comprise pressing a dual-state button.

The providing of a set of acceleration data may comprise adding a first set of acceleration data, which may be pre-defined, to a second set of acceleration data.

5 The determining of the velocity may comprise adding a first member of said first set of acceleration data to a previously determined velocity, which may be zero.

The focus may be a pointer, part of a page of content or a window.

According to the present invention there is provided electronic apparatus configured to carry out the method.

10 According to the present invention there is provided data processing apparatus configured to carry out the method.

According to the present invention there is provided a multimedia home product apparatus configured to carry out the method.

According to the present invention there is provided a personal computer apparatus configured to carry out the method.

15 According to the present invention there is provided a mobile telephone handset configured to carry out the method.

20 According to the present invention there is also provided a computer program to be loaded on data processing apparatus to select an object by controlling movement of an focus on a graphical display using an input device, such that the data processing device receives a signal from said input device; provides a set of acceleration data in dependence upon said signal; determines a position of the focus on the graphical display as a function of said data and displays the focus at said position on the graphical display.

According to the present invention there is also provided a method of selecting one of a plurality of objects on a graphical display using a focus, the method comprising supplying a signal to move the focus, determining a direction of motion of the focus, determining in dependence upon said direction of motion which of one of  
5 said plurality of objects is the intended destination of said focus and highlighting said object for selection.

The determining of which one of said plurality of objects is the intended destination may comprise determining which of said objects is closest to the focus and determining which of said objects substantially lies in the path of the direction of  
10 motion. The determining of which one of said plurality of objects is the intended destination may further comprise defining a metrics system.

According to the present invention there is also provided a computer program to be loaded on data processing apparatus to select one of a plurality of objects on a graphical display using a focus, such that the data processing apparatus receives a  
15 signal to move the focus, determines a direction of motion of the focus, determines in dependence upon said direction of motion which of one of said plurality of objects is the intended destination of said focus and highlights said object for selection.

According to the present invention there is also provided a method of selecting one  
20 of a plurality of objects on a graphical display using a focus, the method comprising: supplying a signal from said input device; providing a set of acceleration data in dependence upon said signal; determining a position of the focus on the graphical as a function of said data, displaying the focus at said position, determining in dependence upon the motion of said focus which of one of said plurality of objects  
25 is the intended destination of said focus and highlighting said object for selection.

According to the present invention there is also provided a method of controlling movement of an object on a graphical display using an input device, the method comprising: supplying a signal from said input device; providing a set of acceleration data in dependence upon said signal; determining a position of the

object on the graphical display as a function of said data and displaying the object at said position.

Embodiments of the present invention will now be described, by way of example, with reference to the accompanying drawings, in which:-

- 5 Figure 1 shows a digital television system including a set-top box;
- Figure 2 is a schematic diagram of browser;
- Figure 3 is a flow diagram of the response of a browser to pressing an arrow key;
- Figure 4 is a schematic diagram of an acceleration buffer;
- Figure 5 is a schematic diagram of an impulse function;
- 10 Figure 6 is a flow diagram of updating the position of a pointer every frame;
- Figure 7 illustrates addition of the contents of the impulse function to the acceleration buffer;
- Figure 8 illustrates calculation of the velocity of a pointer and updating the acceleration buffer;
- 15 Figures 9a, 9b and 9c show different impulse conversion functions;
- Figures 10a, 10b and 10c show acceleration, velocity and relative position of the pointer following a single arrow keystroke;
- Figures 11a, 11b and 11c show acceleration, velocity and relative position of the pointer following two arrow keystrokes;
- 20 Figure 12 shows the maximum allowable velocity of a pointer relative to its position on the contents page;
- Figure 13a and 13b show a moving pointer;
- Figure 14 shows a browser with a different set of links;
- Figure 15 is a flow diagram for predicting which link a user wishes to select;
- 25 Figure 16 illustrates a metrics system which is dependent on the direction and speed of a pointer;
- Figure 17 is a schematic diagram of a contents page and a window viewing part of the contents page;
- Figure 18 is an exploded view of a browser window having a plurality of frames
- 30 each viewing a respective content page;
- Figures 19a, 19b, 19c and 19d illustrates a change switching focus between two frames;

Figure 20 shows a personal computer system and  
Figure 21 shows a mobile telephone handset.

### **Movement of a pointer 11**

Referring to Figure 1, a multimedia home product, for example a digital television  
5 set-top box 1, is connected to a display device in the form of a conventional  
television set 2. The set-top box 1 is controlled by a remote control unit 3 having  
an infrared transmitter 4. The set-top box 1 has an infrared receiver 5 for receiving  
signals from the remote control unit 3. The remote control unit 3 has up, down,  
right and left arrow keys 6a, 6b, 6c, 6d, a select button 6e and a "brake" button 6f,  
10 the function of which will be described in more detail later. In this case, up, down,  
right and left directions correspond to movement as seen on the television set 2.

The set-top box 1 comprises one or several input ports (not shown) including a port  
for a satellite antenna dish, a port for a terrestrial antenna, a port for a cable link  
and a port for a broadband internet connection and an output port (not shown) for  
15 connection to the television set. The set-top box 1 further comprises a  
microprocessor, memory, front-end tuner for filtering the signal, a video chip for  
rendering an image on the television set 2 and a user interface (not shown).

The set-top box 1 may be used to receive and decode digital television channels and  
transmit user information along a return channel. These channels are transmitted  
20 and received through a cable link, although links provided by satellite or terrestrial  
broadcast may also be used.

The set-top box 1 provides Internet services to the user, thus enabling the user to  
read e-mail and "surf the web". To access the web, the set-top box 1 loads and runs  
web browser software, for example a Mozilla web browser, which has been  
25 modified. The modification will be described in detail later.

Referring to Figure 2, a typical browser application 7 is shown. The browser  
application 7 includes a window 8 to view a content page 9. In this example, the  
content page 9 fits the window 8. The content page 9 comprises text and images  
and includes a hypertext link 10. A focus, in this example a pointer 11, is used to



navigate around the content page 9 and desktop 7 including, for example accessing applications 9 and selecting the hypertext link 10.

The arrow keys 6a, 6b, 6c, 6d are used to control the pointer 11 whose motion is modelled on the motion of a physical body. In particular, the pointer 11 moves  
5 around the screen of the television set 2 in a manner similar to a body obeying Newton's second law of motion. A press of one of the arrow keys 6a, 6b, 6c, 6d is used to give the pointer 11 a push. Once pushed, the pointer 11 continues to glide across the window 8. Frictional forces may be included to slow the pointer 11 so that it eventually comes to a stop. Several pushes may be given to accelerate the  
10 pointer 11 to a high velocity. The 'brake' button 6f may also be used to slow the pointer 11. Thus, a press of an arrow key 6a, 6b, 6c, 6d amounts to adding a quantum of energy to the pointer 11, which is eventually "dissipated".

Newton's second law of motion states that the rate of change of linear momentum of a body is equal to the resultant force acting upon it and takes place in the  
15 direction of the force. This may expressed mathematically in terms of the mass, m, and velocity, v, of the body and the resultant force, F:

$$\frac{d(mv)}{dt} = F$$

The second law may be restated as the change of momentum of a body is equal to the product of the resultant force and the time for which it acts. This may be expressed as:

$$\Delta(mv) = F\Delta t$$

20 The product of force and time is known as impulse, I, and is equal to the change of momentum of the body. Thus, applying a force for a fixed duration of time results in a change of velocity. If this 'push' is repeated, then velocity of the body will increase. However, other forces, due to friction may compete and slow the body down.

In the following examples, movement of the pointer 11 closely resembles movement of a body of fixed mass as will now be described.

Referring again to Figure 2, in a first example, the user wishes to select the link 10. The pointer 11 is located just to the left of the link 10 at a first position 12a. The user presses the right arrow key 6c once on the remote control unit 3. The pointer 11 accelerates to the right and begins to slow down until it stops about half way between the link 10 and the pointer's initial position 12a. The user again presses the right arrow key 6c and the pointer 11 acceleration again and gradually deaccelerates until it stops on top of the link 10. If the user thinks that the pointer 11 will not slow down enough and stop in time, they may press the 'brake' button 6f. Once the pointer 11 stops at the link 10 and the link 10 is highlighted, the user presses the 'select' button 6e and the link 10 is selected.

In a second example, the user wishes to select the link 10 again. However, the pointer 11 is located further to the left of the first position 12a at a second position 12b. The user presses the right arrow key 6c once. The pointer 11 starts to move quickly and begins to slow down. Before the pointer 11 has come to a stop, the user presses the right key 6c once more. The pointer 11 gains more speed, moving more quickly than it did when it started and begins to deaccelerate. Consequently, the pointer 11 covers ground much more quickly to begin with.

The maximum velocity of the pointer 11 may be limited to prevent overshoot and to ensure smooth movement of the pointer 11.

It will be appreciated that the other three arrow keys 6a, 6b, 6d operate in a similar fashion to control movement of the pointer 11 in the other three directions.

A method of controlling the pointer 11 according to the present invention will now be described. The browser software is modified to implement the method. It will be appreciated that the method may be implemented in other ways, for example as a mouse driver in any environment designed to use a mouse such as Microsoft Windows or Linux running a user environment such as KDE and GNOME or as a

dedicated driver in an application. The latter implementation is useful where a system is not designed to use a mouse in the first place, such as this example.

The method comprises two processes. The first process is executed whenever a key is pressed, which could be every few seconds or so, and comprises updating a buffer  
5 holding values to be used in calculating a velocity,  $v$ , of the pointer 11. The second process is repeated every time a frame is updated on the display, for example every  $1/50^{\text{th}}$  of a second. It comprises reading out a value from the buffer which is at the front of a queue and calculating the velocity,  $v$ , and position,  $p$ , of the pointer 11.

Referring to Figure 3, the first process is described in more detail. The driver waits  
10 for the right arrow key 6c to be pressed (step S1). If the right arrow key 6c is pressed, a predefined impulse function  $I[x]$  is added to a horizontal acceleration buffer  $b[x]$  (step S2).

Referring to Figures 4 and 5, the horizontal acceleration buffer  $b[x]$  comprises a  
15 string 13 of elements 14 each holding a signed value of acceleration. The sign of the value indicates the direction of acceleration. A positive value corresponds to acceleration from left to right. An element 14 may hold a value of zero. The impulse function  $I[x]$  comprises a string 15 of elements holding signed values of acceleration quanta 16. In this example, the acceleration buffer and the impulse function have the same number of elements, for example 5 or 10 elements.

20 Referring to Figure 6, the second process is shown in which the position,  $p$ , of pointer 11 is updated every frame. The driver looks up the value at the beginning of the acceleration buffer string 13, namely the value stored at  $b[0]$ , and adds it to a value of velocity,  $v$ , of the pointer 11 along the x-axis (step S3). If the pointer 11 is at rest, then  $v = 0$ . The elements 14 within the acceleration buffer are shifted along  
25 by one, so that the value at the beginning of the string  $b[0]$  is removed and is replaced with the value previously held at  $b[1]$  (step S4). The element  $b[n]$  at the end of the string 13 is filled with a zero value. As a result, a new value is stored at  $b[0]$ , ready for the next frame update. The velocity calculated at step S3 is checked to see whether it exceeds a predefined maximum (step S5). If it does, then the

velocity of the pointer 11 along the x-axis is limited (step S6). The position is calculated by adding the value of velocity,  $v$ , to the value of position,  $p$  (step S7). The value of velocity is then adjusted for friction (step S8). Although, this will not be reflected in the position of the pointer 11 in this frame, it will affect it in the next frame. In this example, the velocity is reduced by  $v - \text{sign}(v) * f * \text{abs}(v)$ , i.e. the velocity is reduced by a factor  $(1-f)$ , where  $f$  is a constant of friction between 0 and 1 and  $v$  is the velocity. Other types of friction may be used, expressed as a constant or as a fraction of the velocity, for example  $v = v - \text{sign}(v) * \min(\text{abs}(v), f)$ . The process checks a buffer (not shown) to see if the 'brake' button 6f has been pressed (step S9). If it is detected that the 'brake' button 6f has been pressed since the last frame was displayed, then the velocity is reduced by a further factor  $(1-f)$  (step S10). Finally, the pointer 11 is displayed at its new position,  $p$  (step S11).

Referring to Figure 7, a typical acceleration buffer string 13<sub>1</sub> is shown having five elements 14<sub>1</sub>, 14<sub>2</sub>, 14<sub>3</sub>, 14<sub>4</sub>, 14<sub>5</sub>. The first and second elements 14<sub>1</sub>, 14<sub>2</sub> hold values 'a' and the other elements 14<sub>3</sub>, 14<sub>4</sub>, 14<sub>5</sub> hold value of zero. An example of an impulse function 15<sub>1</sub> is shown having five elements 16<sub>1</sub>, 16<sub>2</sub>, 16<sub>3</sub>, 16<sub>4</sub>, 16<sub>5</sub> each holding a value of 'a'. If a right arrow key 6c is pressed then the impulse function 15<sub>1</sub> is added to the acceleration buffer string 13<sub>1</sub> with the elements 14<sub>1</sub>, 14<sub>2</sub>, 14<sub>3</sub>, 14<sub>4</sub>, 14<sub>5</sub> holding a new set of values.

In Figure 8, the first two steps of calculating the velocity of the pointer 11 and updating the acceleration buffer 13<sub>1</sub> are illustrated with respect to the example shown in Figure 7. In this example, the addition of the impulse function 15<sub>1</sub> to the acceleration buffer has just occurred. It will be appreciated that no such addition need have occurred since the last frame refresh. The value held in the first element 14<sub>1</sub> of the acceleration buffer 13<sub>1</sub> is added to a buffer 17<sub>1</sub> holding the velocity of the pointer 11. This corresponds to step S3 as shown in Figure 6. The values held in the elements of the acceleration buffer 13<sub>1</sub> are shifted to the left. Thus, the fifth element 14<sub>5</sub> holds a value of zero.

The predefined impulse function  $I[x]$  comprises one or more discrete values based upon an impulse conversion function. The impulse conversion function determines the rate at which the pointer 11 accelerates.

Referring to Figures 9a, 9b and 9c, three impulse conversion functions are  
5 illustrated. In Figure 9a, the impulse conversion function is constant and a function of this shape was used in the example described with reference to Figure 7. Other impulse conversion function shapes may be used including ones that are triangular as shown in Figure 9b or one of a general shape as shown in Figure 9c.

Referring to Figures 10a, 10b and 10c, the motion of the pointer 11 starting from  
10 rest following a single press of the right arrow key 6c is shown. In Figure 10a, the acceleration of the pointer 11 is shown. Before time  $t_1$ , when the key 6c is pressed, the acceleration buffer 16 is empty. At time  $t_1$ , each element 14 of the buffer 16 is filled with the same value. Between time  $t_1$  and  $t_2$ , the process described in Figure 6 is repeatedly carried out. Each time a frame is refreshed, a further quantum of  
15 acceleration is added and so acceleration increase. The acceleration buffer 13 is purged of a non-zero value and is supplied with a zero value. After time  $t_2$ , the acceleration buffer holds only zero values and so the acceleration becomes negative due to the influence of friction. The increasing acceleration and deacceleration is reflected in the velocity profile in Figure 10b. Thus, movement of the pointer 11 is  
20 rapid at first, then slower and finally stops at time  $t_3$  as shown in Figure 10c.

Referring to Figures 11a, 11b and 11c, the motion of the pointer 11 starting from rest following a double press of the right arrow key 6c is shown. Referring to Figure 11a, the pointer 11 accelerates from time  $t_4$  after the key is pressed for the first time. At time  $t_5$ , the pointer stops accelerating. However, a second key press  
25 at time  $t_6$  causes the pointer to start accelerating again until time  $t_7$ . Eventually, the pointer comes to a stop at time  $t_8$ .

It will be appreciated that the second keystroke may follow shortly after the first and before the acceleration buffer has been emptied. It will also be appreciated that further key strokes may be used to move the pointer even more quickly.

Referring to Figure 12, the maximum velocity at which the pointer 11 is allowed to move is limited according to the position of the pointer 11 relative to the edge of the displayed page or content page. This is particularly useful when the method hereinbefore described is used in a web-browser to view a content page which is larger than the visible window. As the pointer approaches the edge of the content page, the maximum velocity is reduced. This allows the pointer 11 to move smoothly.

So far, only horizontal movement of the pointer has been described. However, vertical movement is also controlled independently using the same method. It will be appreciated that a separate, vertical acceleration buffer is used for movement of the pointer relative to the y-axis. The impulse function is the same to ensure uniform movement, although a different impulse function could be used.

Referring to Figure 13a and 13b, a combination of vertical control keys 6a, 6b and horizontal control keys 6c, 6d may be pressed to steer the pointer 11 in diagonal directions, as shown in Figure 13a. Alternatively, the pointer 11 may begin moving in one direction, for example horizontally, and a vertical component may be added while the pointer 11 glides, to yield diagonal motion as shown in Figure 13b. Thus, the pointer 11 is not constrained to move in the orthogonal directions defined by the arrow keys 6a, 6b, 6c, 6d.

Thus, this method of selecting a link has the advantage that the pointer 11 can be moved in directions other than those defined by the arrow keys 6a, 6b, 6c, 6d. Furthermore, the user does not need to keep pressing the keys 6a, 6b, 6c, 6d to move the pointer 11.

#### **Predicting the selectable link 10**

Referring to Figure 14, the browser application 7 is used to view a content page 9a having first, second, third, fourth and fifth hypertext links 10a, 10b, 10c, 10d, 10e. The pointer 20 is controlled using the method hereinbefore described but modified to predict which link 10 the user wishes to select.

The user intends to select the second link 10b. The user begins to move the pointer 11 in the direction of the second link 10b. Based upon the initial movement of the pointer 11, the browser predicts which link 10 lies in the path of the direction of motion of the pointer 11 and is likely to be the intended link to be selected. In this case, the browser predicts that the user wishes to select the second link 10b and marks it as a selectable object in focus. If the 'select' button 6e is pressed, then the second link 10b is selected.

A method of anticipating selection of an object will now be described.

Referring to Figure 15, motion of the pointer 11 triggers calculation of a metric system. This may occur after step S11 in Figure 6. The direction and speed of the pointer 11 is determined (step S12). The x-y co-ordinate system is rotated so that it aligned with the direction of motion of the pointer 11, so that in the rotated x'-y' co-ordinate system, the x' direction is parallel to the direction of motion,  $\underline{v}$  (step S13). The rotated co-ordinate system is scaled in the x' direction by a compression factor  $k/(|v| + 1)$  for  $x' > 0$ , where  $|v|$  is the speed of the pointer 11 and k is scaling constant (step S14). The rotated co-ordinate system is not compressed in the y' direction (step S15). The distance between the pointer 11 and each link 10 is determined as a radius, r, (step S16) using the modified x''-y' co-ordinate system, such that:

$$r = \sqrt{(x'')^2 + (y')^2}$$

Viewed in the x-y co-ordinate system, each measured radius for each link 10 traces a respective ellipse 18 as shown in Figure 16. The link 10 having the smallest measured radius is marked as a selectable object by changing its colour or placing a box around it (steps S17 & S18). In this example, the second link 10b is marked. The system waits to see if the user selects the marked link 10b (step S19). If the user presses the mouse button or the 'select' button 6e then the marked link 10b is selected (step S20). Otherwise, the process returns to step S1 (Figure 6) to update the update the motion of the pointer 11 and, based on a fresh set of motion parameters, make another prediction.

This provides another method of selecting an object. Although the pointer 11 has not reached the second link 10b, the second link 10b may nevertheless be selected. This has several advantages. For example, movement of the pointer 11 can be relatively coarse compared with the fine movements required to position it over a link 10. Furthermore, navigation about the content page 9 is quicker. However, the user may ignore the prediction and may move the pointer 11 to the same or another link 10 by further use of the keys 6 and once there, select it.

### Movement of a window 8 over a content page 9

#### *Single viewing window 8*

Referring again to Figure 14, the browser window 17 views only part of the web page 9a. The browser application 7 is modified to allow the arrow keys 6a, 6b, 6c, 6d to scroll the window 8 over the contents page 9a.

The browser application 7 is modified to operate in two modes. In a navigation mode, the user is able to move the pointer 11 about the window 8. However, if the pointer 11 is moved to the edge of the window 8, then the window 8 begins to scroll. Thus, if the pointer is moved to the right-hand edge of the window 8 and the pointer 11 is still moving or the user presses the right arrow key 6c then the window 8 moves to the right relative to the content page 9. In a viewing mode, the user is able to move the window 8 relative to the content page 9. No pointer 11 is displayed in the window 9 and no links may be selected. The viewing mode is useful for scanning a large page of content 9.

Referring to Figure 17, a schematic diagram of the whole web page 9a' and the browser window 8 is shown. A portion of the page 9a' is not visible, as indicated by hatching. In the viewing mode, the window 8 may be moved relative to the page 9a' in order to reach other parts of the page 9a'. Movement of the window 8 relative to the contents page 9 is controlled using the method described with reference to Figures 1 to 13, except that rather than moving the pointer 11, objects within the contents page 18 are moved. The method is modified so that when the right arrow key 6c is pressed, the page 9 moves to the left and *vice versa*. Similarly, if the up arrow key 6a is pressed, the page 9 scrolls down and *vice versa*. The maximum



velocity which the window 8 may move relative to the page 9 also varies as described with reference to Figure 12. The friction component may be dispensed with by the removal of step S8 in Figure 6. This has the advantage that the user is able to scroll the window 8 without having to keep pressing the arrow keys 6 on the remote control unit 3.

#### *Multiple viewing windows 8*

The browser application supports viewing of a plurality of windows 8, called frames, at the same time. Thus, the browser software is modified to the window 8 in focus to change from one window 8 to another.

Referring to Figure 18, the viewing window 8 is split into first, second, third, fourth and fifth further viewing windows 8a, 8b, 8c, 8d, 8e, such as frames, each viewing content pages 9, 9b, 9c, 9d, 9e respectively. Focus may be switched between viewing windows 8 in one of two ways.

Referring to Figure 19, the first way of switching the focus is explained in terms of switching focus from a sixth viewing window 8f to an adjacent seventh window 8g viewing respective sixth and seventh contents pages 9f, 9g. The sixth contents page 9f is scrolled towards the right by pressing the left arrow key 6d, as shown in Figure 19a. When the left edge of the page 9f reaches the left edge of the sixth window 8f, as shown in Figure 19b, and the user presses the right arrow key 6d a further predefined number of times, for example 3 times, the focus changes to the seventh window 8g as shown in Figure 19c. The user can then scroll the seventh page 9g, as shown in Figure 19d. If there are more than one adjacent windows, as shown in Figure 18, where the focus can switch from the first window 8a to either the third or fourth windows 8c, 8d, one of the adjacent windows 8 may be selected according to a pre-defined set of rules.

A second way of switching between viewing windows is to switch to a frame selecting mode, by pressing a mode-switching key, and to use the arrow keys 6 to move from one window 8 to another. The window 8 in focus may be highlighted

as having a border of a different colour. Depressing the mode-switching key allows scrolling of the selected window 8.

The methods of selecting links and moving windows may be applied to browser applications run on PCs and mobile telephone handsets. Furthermore, these  
5 methods may be used in any application, for example word processors such as Microsoft Word and desktop environments such as Windows.

Referring to Figure 20, a personal computer system 19 comprises a hardware box  
20, a keyboard 21, a mouse 22 and a monitor 23. The keyboard 21 includes up,  
down, right and left arrow keys 23a, 23b, 23c, 23d, an 'enter' key 23e and a 'shift'  
10 key 23f. The hardware box 20 houses a microprocessor, memory, a hard disk, a floppy disk drive, a CD-ROM drive and input/output ports for connection to a network and attachment of peripherals (not shown). The personal computer system  
19 runs an operating system such as Microsoft Windows 95. A pointer or a cursor  
may be controlled using the keys 23 or the mouse 22. When the keys 23 are used to  
15 control the pointer any of the methods hereinbefore described may be used. If the mouse 22 is used, initial movement of the pointer or cursor may be used to predict which selectable object, such as a hypertext link or icon, the user wishes to select.

Referring to Figure 21, a mobile telephone handset 24 is configured to load and run  
browser software and view the content page 9 on a display 25. A pointer or a  
20 window may be scrolled by used of a keypad 26 or a dedicated four-way roller button 27.

## Claims

1. A method of selecting an object by controlling movement of a focus on a graphical display using an input device, the method comprising: supplying a signal from said input device; providing a set of acceleration data in dependence upon said  
5 signal; determining a position of the focus on the graphical display as a function of said data and displaying the focus at said position.
2. A method according to claim 1, further comprising determining an acceleration of the focus as a function of the data.
3. A method according to claim 2, further comprising determining a velocity  
10 of the focus in dependence upon the acceleration.
4. A method according to any preceding claim, further comprising determining in dependence upon the direction of motion of said focus whether said object is the intended destination of said focus and highlighting said object for selection.
- 15 5. A method according to claim 4, wherein the determining comprises defining a metric system.
6. A method according to any preceding claim, further comprising updating the acceleration using some or all of the data, updating the velocity and position of the focus and displaying the focus at the updated position.
- 20 7. A method according to any preceding claim, further comprising determining whether the velocity of the focus exceeds a predefined maximum.
8. A method according to claim 7, further comprising limiting the velocity of the focus if it exceeds the predefined maximum.
9. A method according to any preceding claim, wherein the supplying of a  
25 signal comprising pressing a dual-state button.

10. A method according to any preceding claim, wherein said providing a set of acceleration data comprises adding a first set of acceleration data to a second set of acceleration data.

11. A method according to claim 10, further comprising predefining the first set of acceleration data.

12. A method according to either claim 10 or 11, wherein the determining of the velocity comprises adding a first member of said first set of acceleration data to a previously determined velocity.

13. A method according to claim 12, wherein the previously determined velocity is zero.

14. A method according to any preceding claim, wherein the focus is a pointer.

15. A method according to any one of claims 1 to 13 wherein the focus is a part of a page of content.

16. A method according to any one of claims 1 to 13 wherein the focus is a window.

17. A method of selecting an object by controlling movement of a focus on a graphical display using an input device substantially as herein before described with reference to Figures 1 to 13 of the accompanying drawings.

18. A method of selecting an object by controlling movement of a focus on a graphical display using an input device substantially as herein before described with reference to Figures 1 to 16 of the accompanying drawings.

19. A method of selecting an object by controlling movement of a focus on a graphical display using an input device substantially as herein before described with reference to Figures 1 to 13 and 17 to 20 of the accompanying drawings.

20. Electronic apparatus configured to carry out the method according to any preceding claim.
21. Data processing apparatus configured to carry out the method according to claims 1 to 17.
- 5 22. A multimedia home product apparatus configured to carry out the method according to claims 1 to 17.
23. A personal computer apparatus configured to carry out the method according to claims 1 to 17.
24. A mobile telephone handset configured to carry out the method according  
10 to claims 1 to 17.
25. A computer program to be loaded on data processing apparatus to select an object by controlling movement of an focus on a graphical display using an input device, such that the data processing device receives a signal from said input device; provides a set of acceleration data in dependence upon said signal; determines a  
15 position of the focus on the graphical display as a function of said data and displays the focus at said position on the graphical display.
26. A method of selecting one of a plurality of objects on a graphical display using a focus, the method comprising supplying a signal to move the focus, determining a direction of motion of the focus, determining in dependence upon  
20 said direction of motion which of one of said plurality of objects is the intended destination of said focus and highlighting said object for selection.
27. A method according to claim 26, wherein the determining of which one of said plurality of objects is the intended destination comprises determining which of said objects is closest to the focus.
- 25 28. A method according to either claim 26 or 27, wherein the determining of which one of said plurality of objects is the intended destination comprises

determining which of said objects substantially lies in the path of the direction of motion.

29. A method according to any one of claims 26 to 28, wherein the determining of which one of said plurality of objects is the intended destination further  
5 comprises defining a metrics system.

30. A method of selecting one of a plurality of objects on a graphical display using a focus substantially as hereinbefore described with reference to Figures 14, 15 and 16 of the accompanying drawings.

31. A computer program to be loaded on data processing apparatus to select  
10 one of a plurality of objects on a graphical display using a focus, such that the data processing apparatus receives a signal to move the focus, determines a direction of motion of the focus, determines in dependence upon said direction of motion which of one of said plurality of objects is the intended destination of said focus and highlights said object for selection.

15 32. A method of selecting one of a plurality of objects on a graphical display using a focus, the method comprising: supplying a signal from said input device; providing a set of acceleration data in dependence upon said signal; determining a position of the focus on the graphical as a function of said data, displaying the focus at said position, determining in dependence upon the motion of said focus  
20 which of one of said plurality of objects is the intended destination of said focus and highlighting said object for selection.

33. A method of controlling movement of an object on a graphical display using an input device, the method comprising: supplying a signal from said input device; providing a set of acceleration data in dependence upon said signal;  
25 determining a position of the object on the graphical display as a function of said data and displaying the object at said position.

## Abstract

### Method of selecting an object

5 Movement of a pointer or a window on a display of a personal computer, mobile  
telephone or digital television set, which allows an object to be selected, is  
controlled using an orthogonal set of keys. Motion of the pointer or window  
closely resembles the behaviour of a body of fixed mass obeying Newton's second  
law of motion. Movement of the pointer may used to predict which object the user  
wishes to select. Once a prediction has been made, the object is marked and the  
10 user may select the marked object, although the user need not act on the prediction.

(Figure 6)

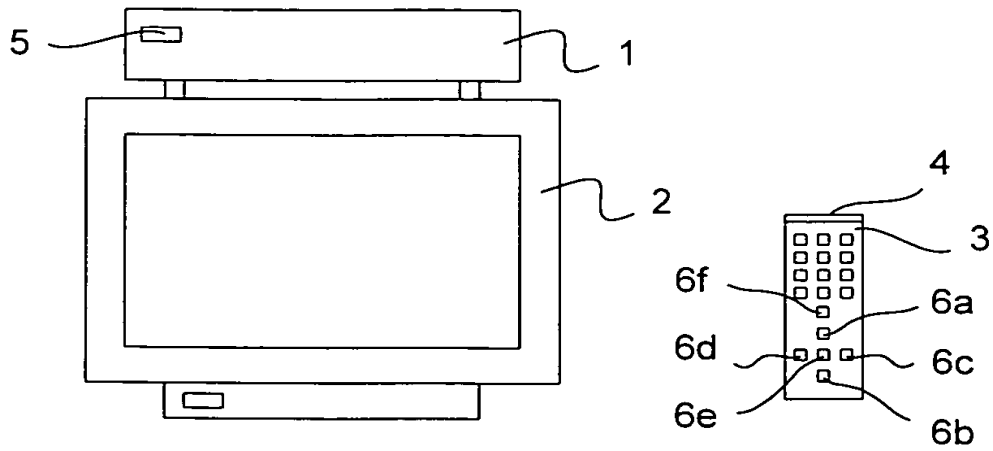


Figure 1

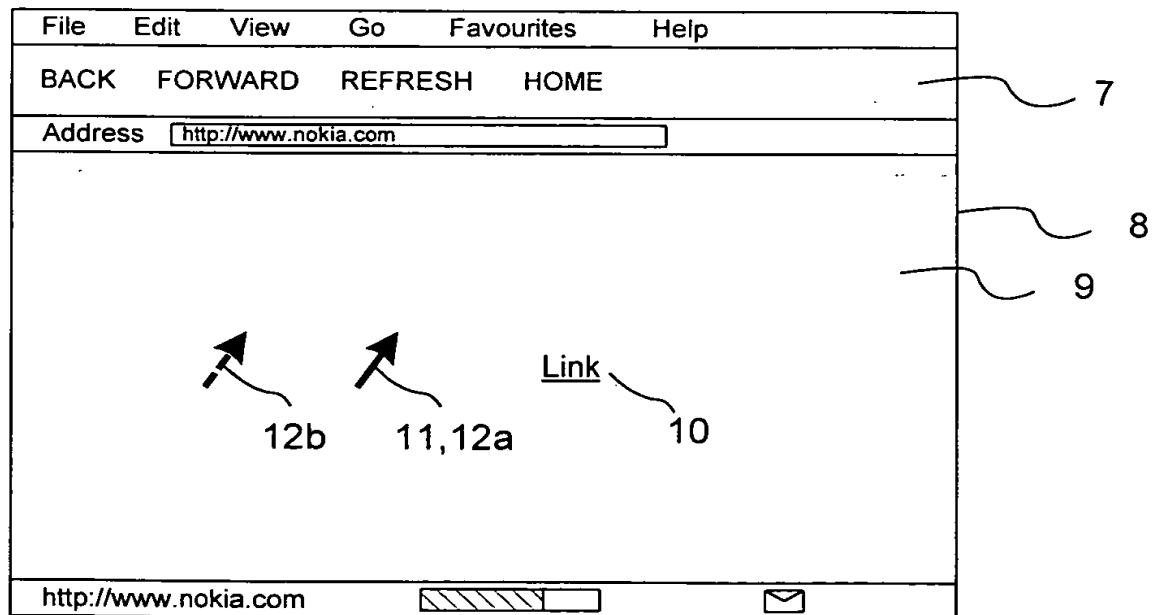


Figure 2



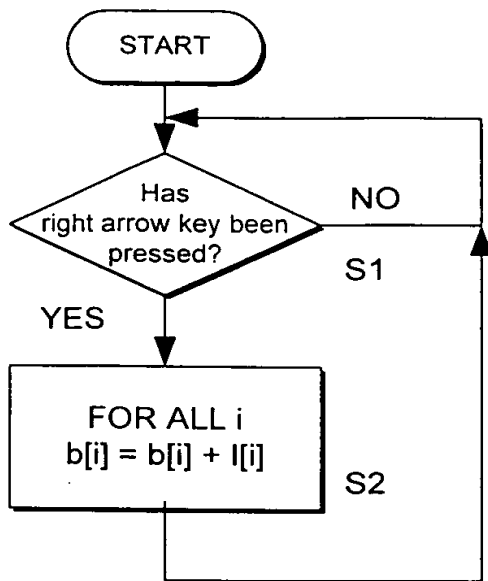


Figure 3

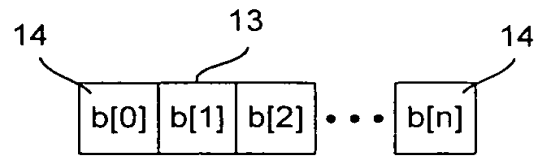


Figure 4

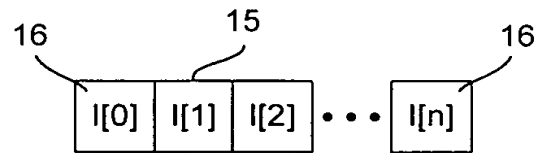


Figure 5

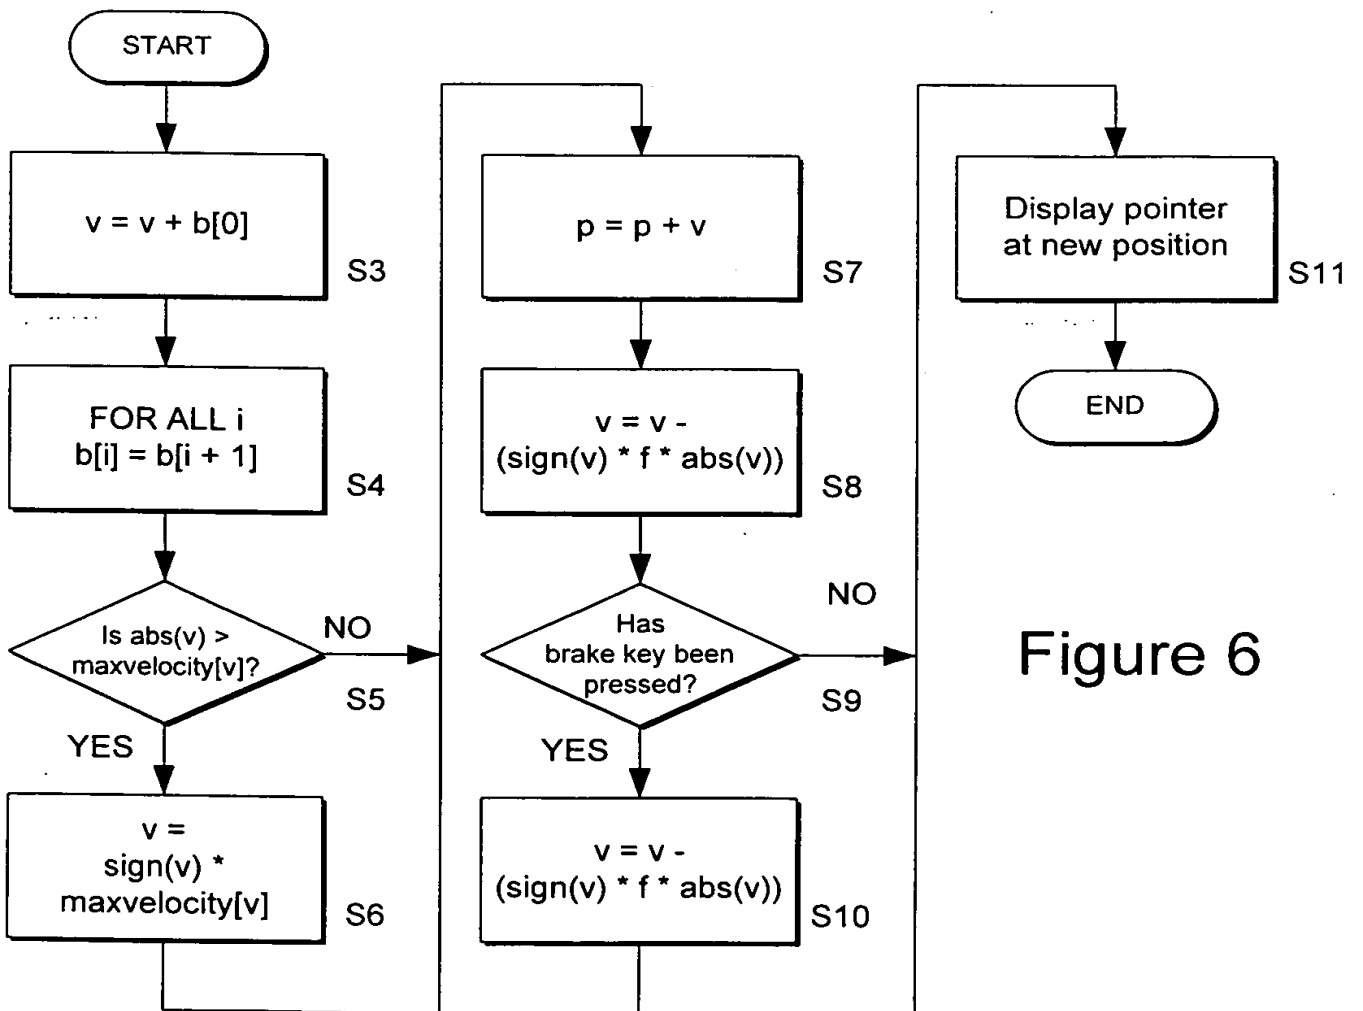


Figure 6

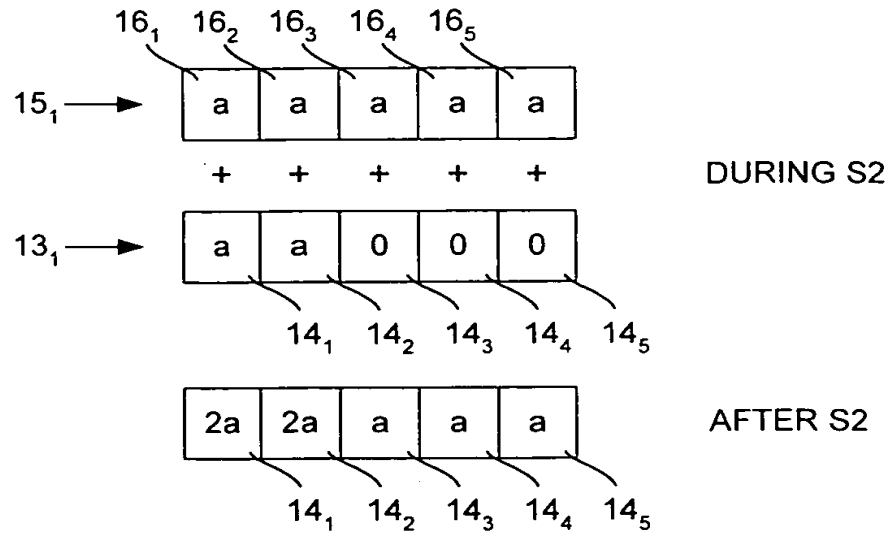


Figure 7


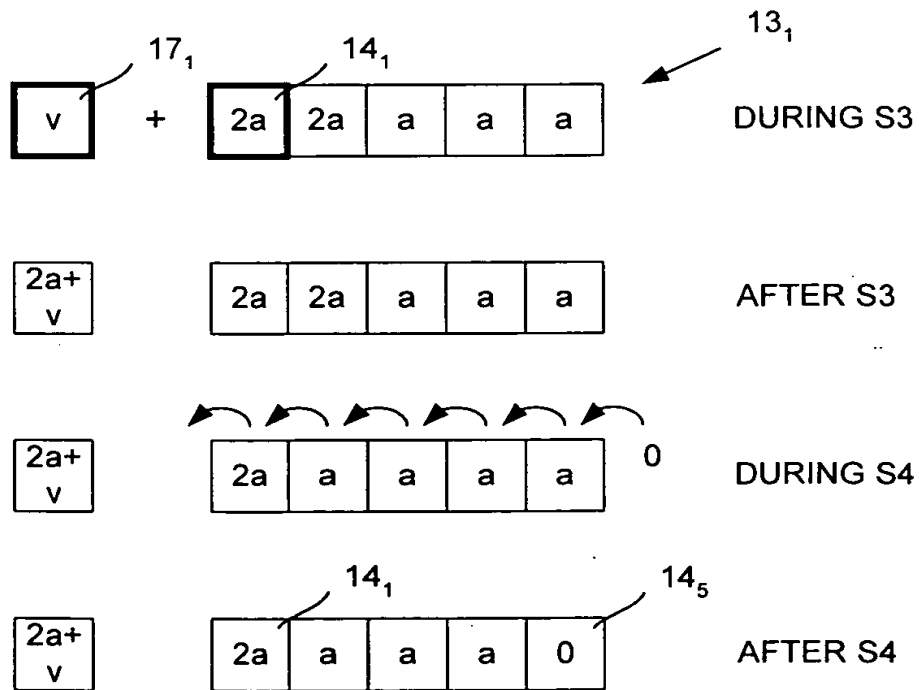


Figure 8


4/9

rate of change of  
acceleration




a)

rate of change of  
acceleration



b)


rate of change of  
acceleration



c)


Figure 9

acceleration  
along x-axis

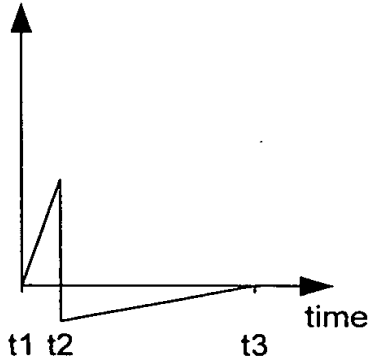


a)

velocity along  
x axis

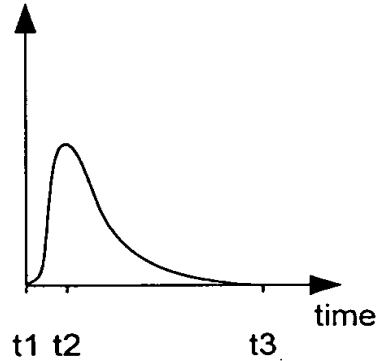

b)


relative position  
along x axis

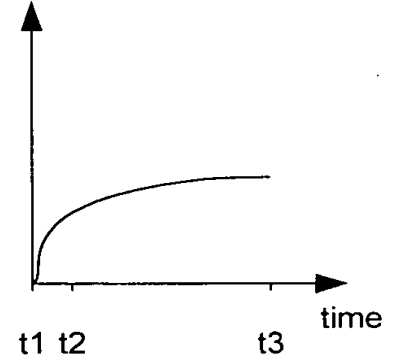

c)


Figure 10

acceleration  
along x axis

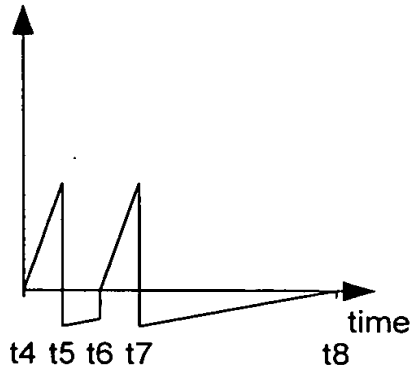


a)

velocity along  
x axis

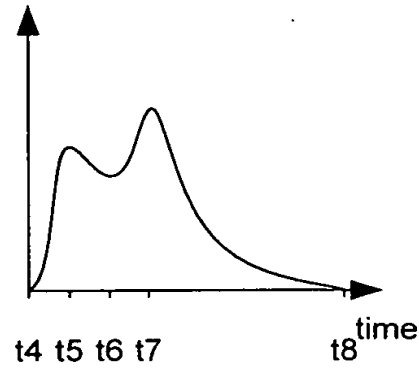

b)

relative position  
along x axis

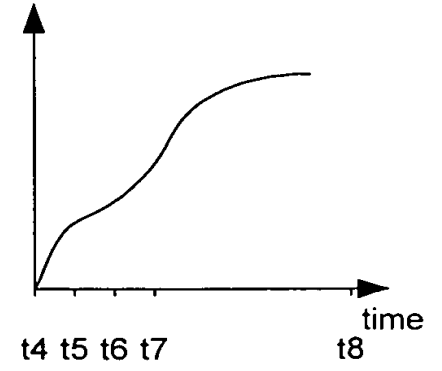

c)

Figure 11

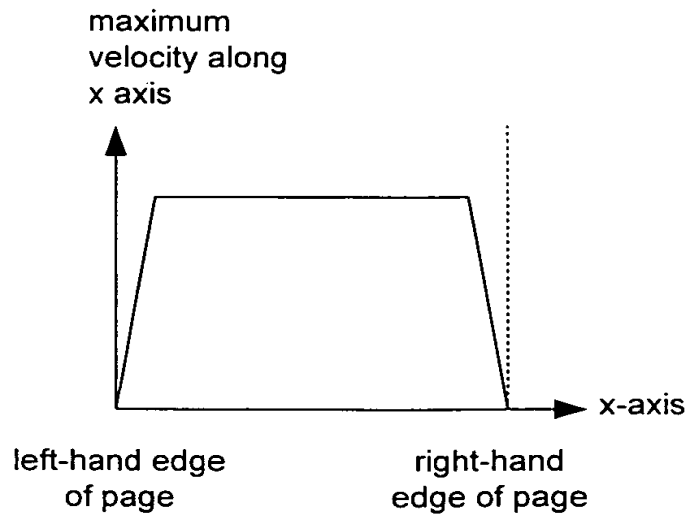


Figure 12

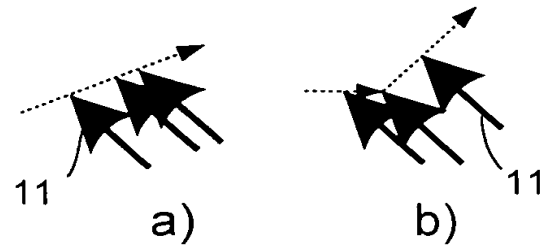


Figure 13

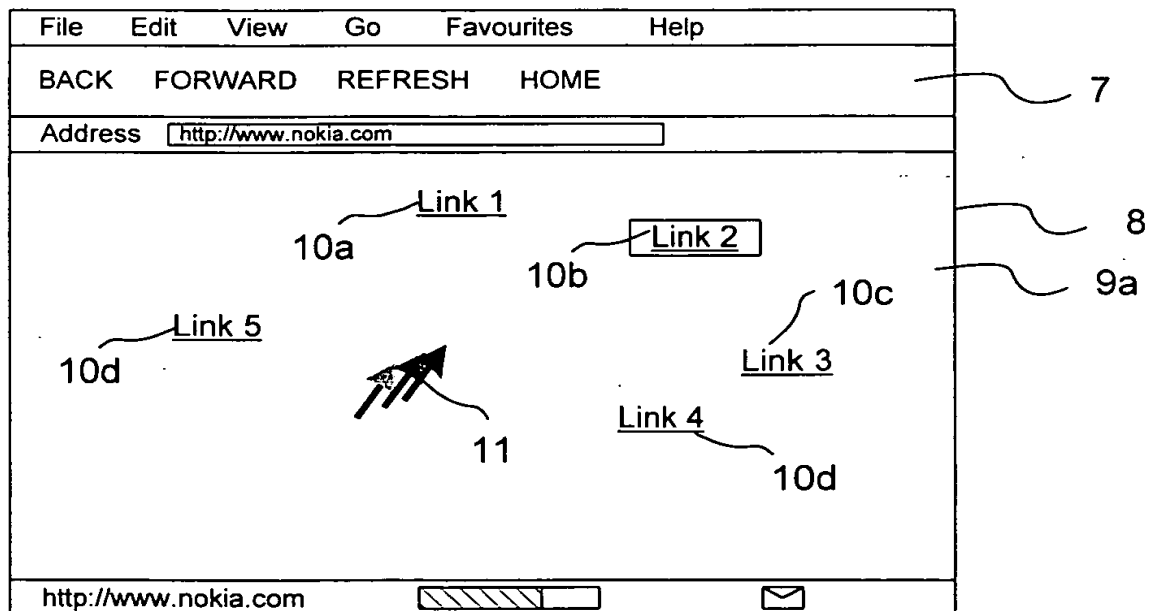
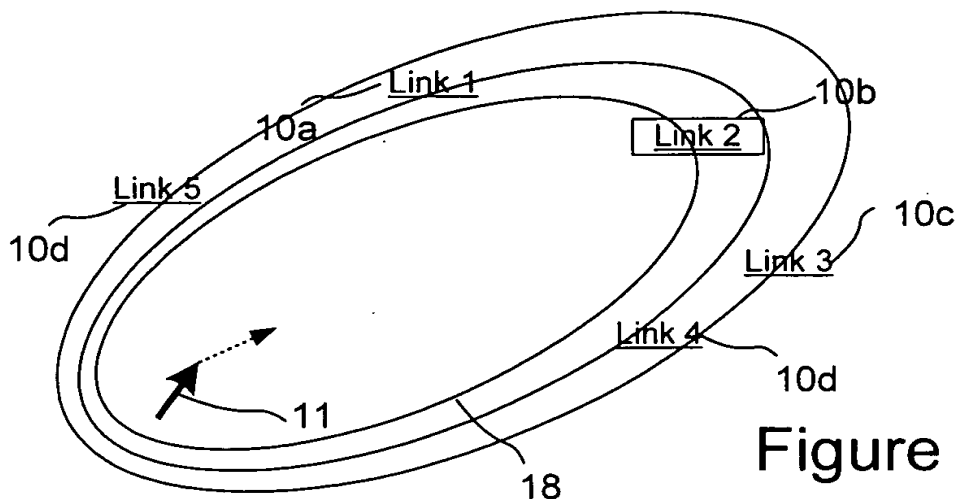
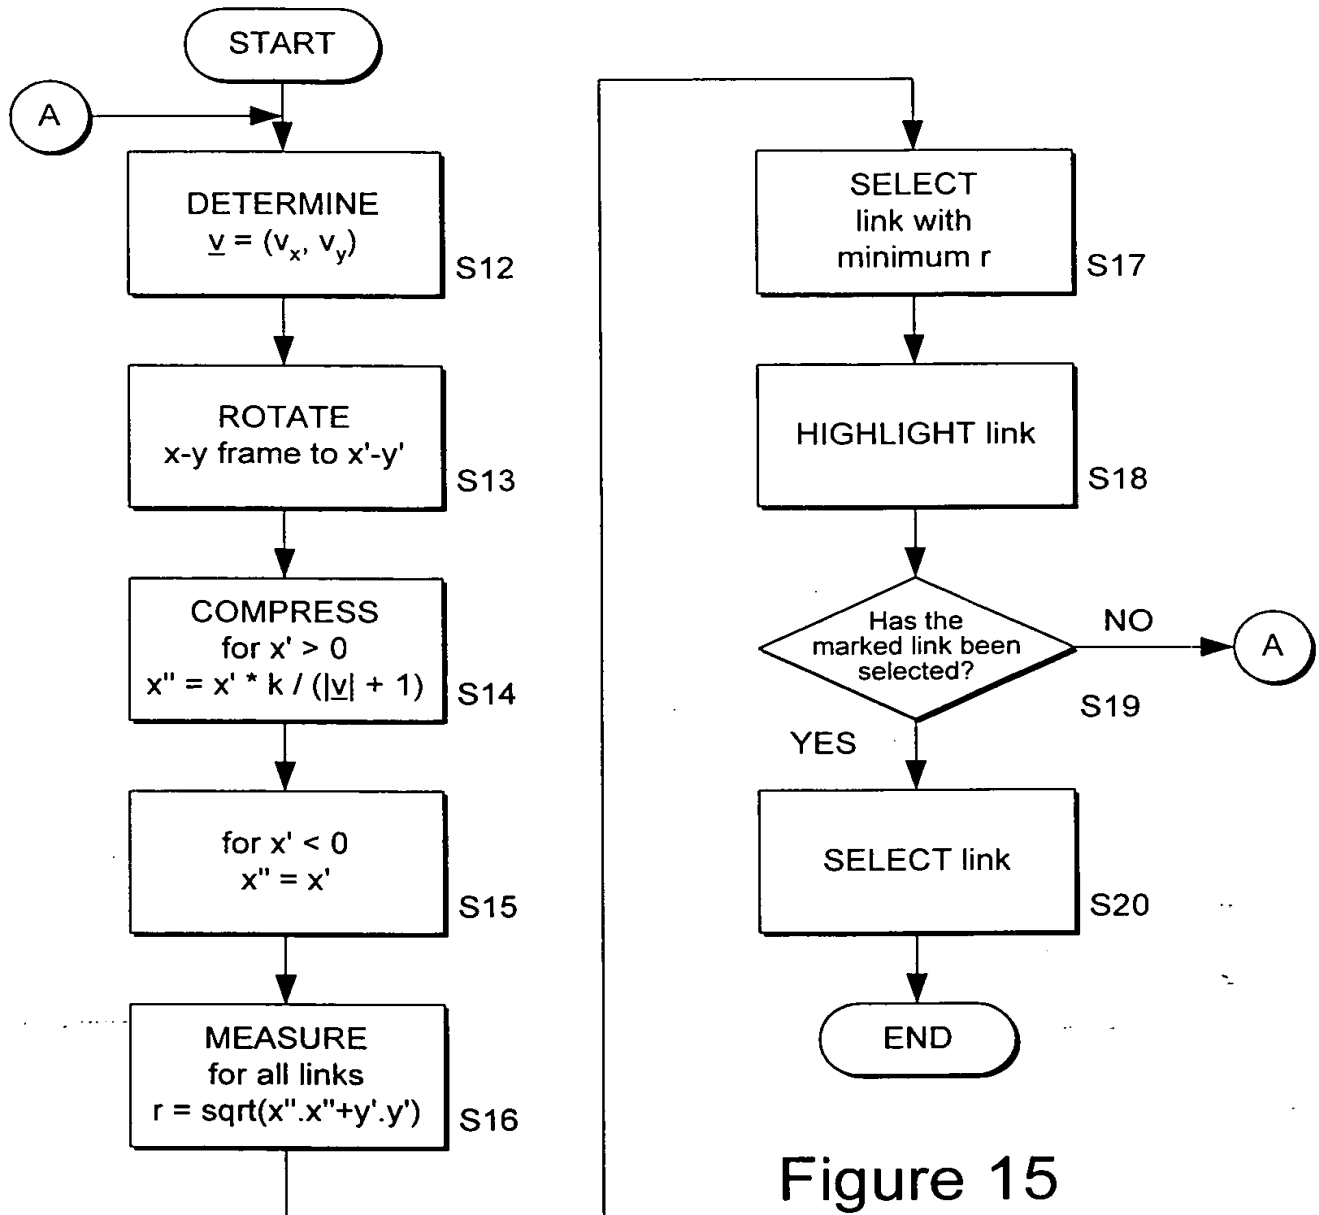


Figure 14



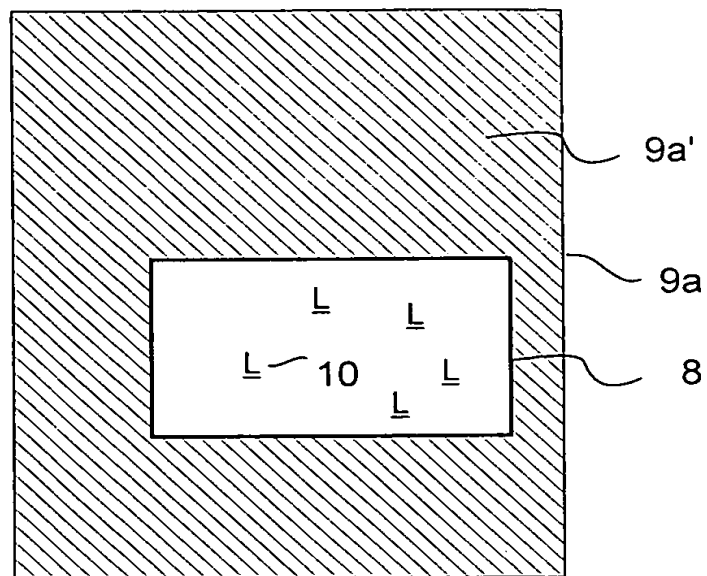


Figure 17

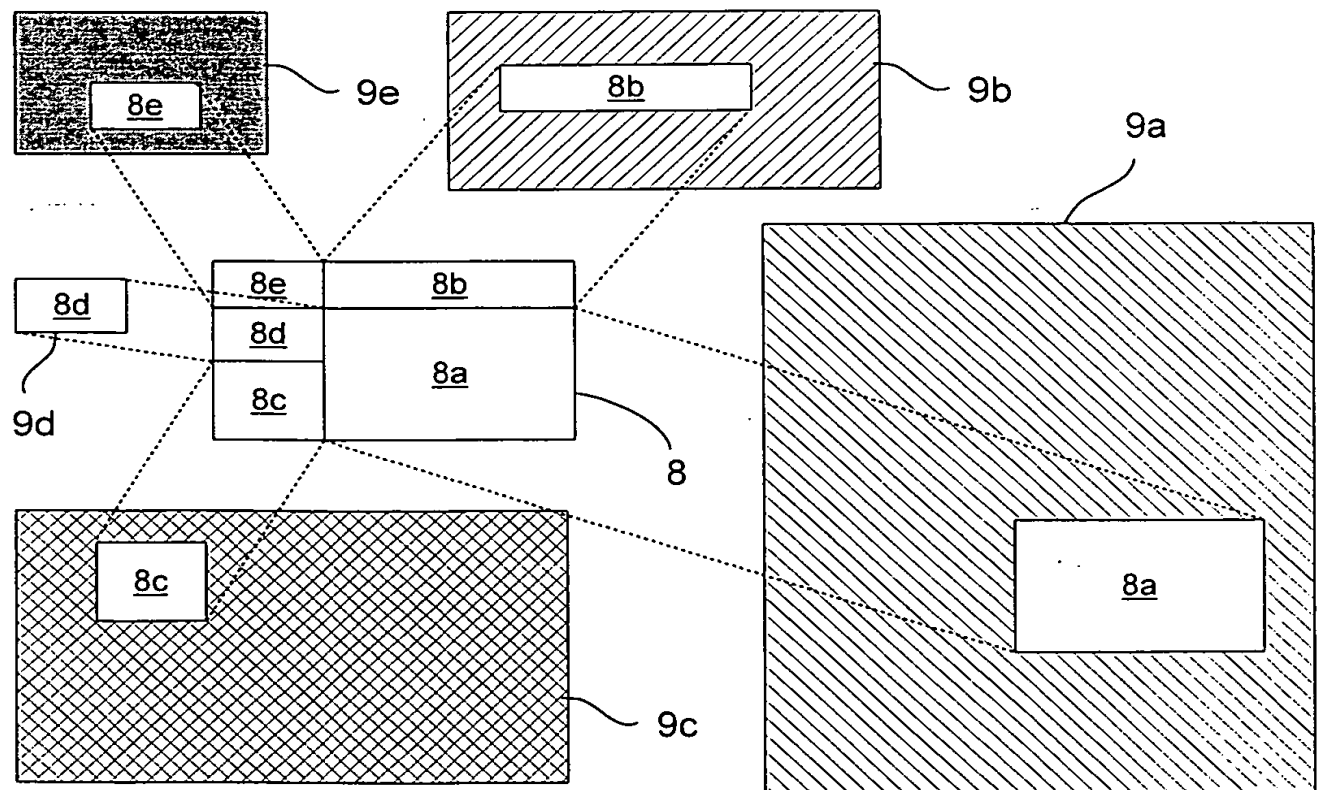


Figure 18

8/9

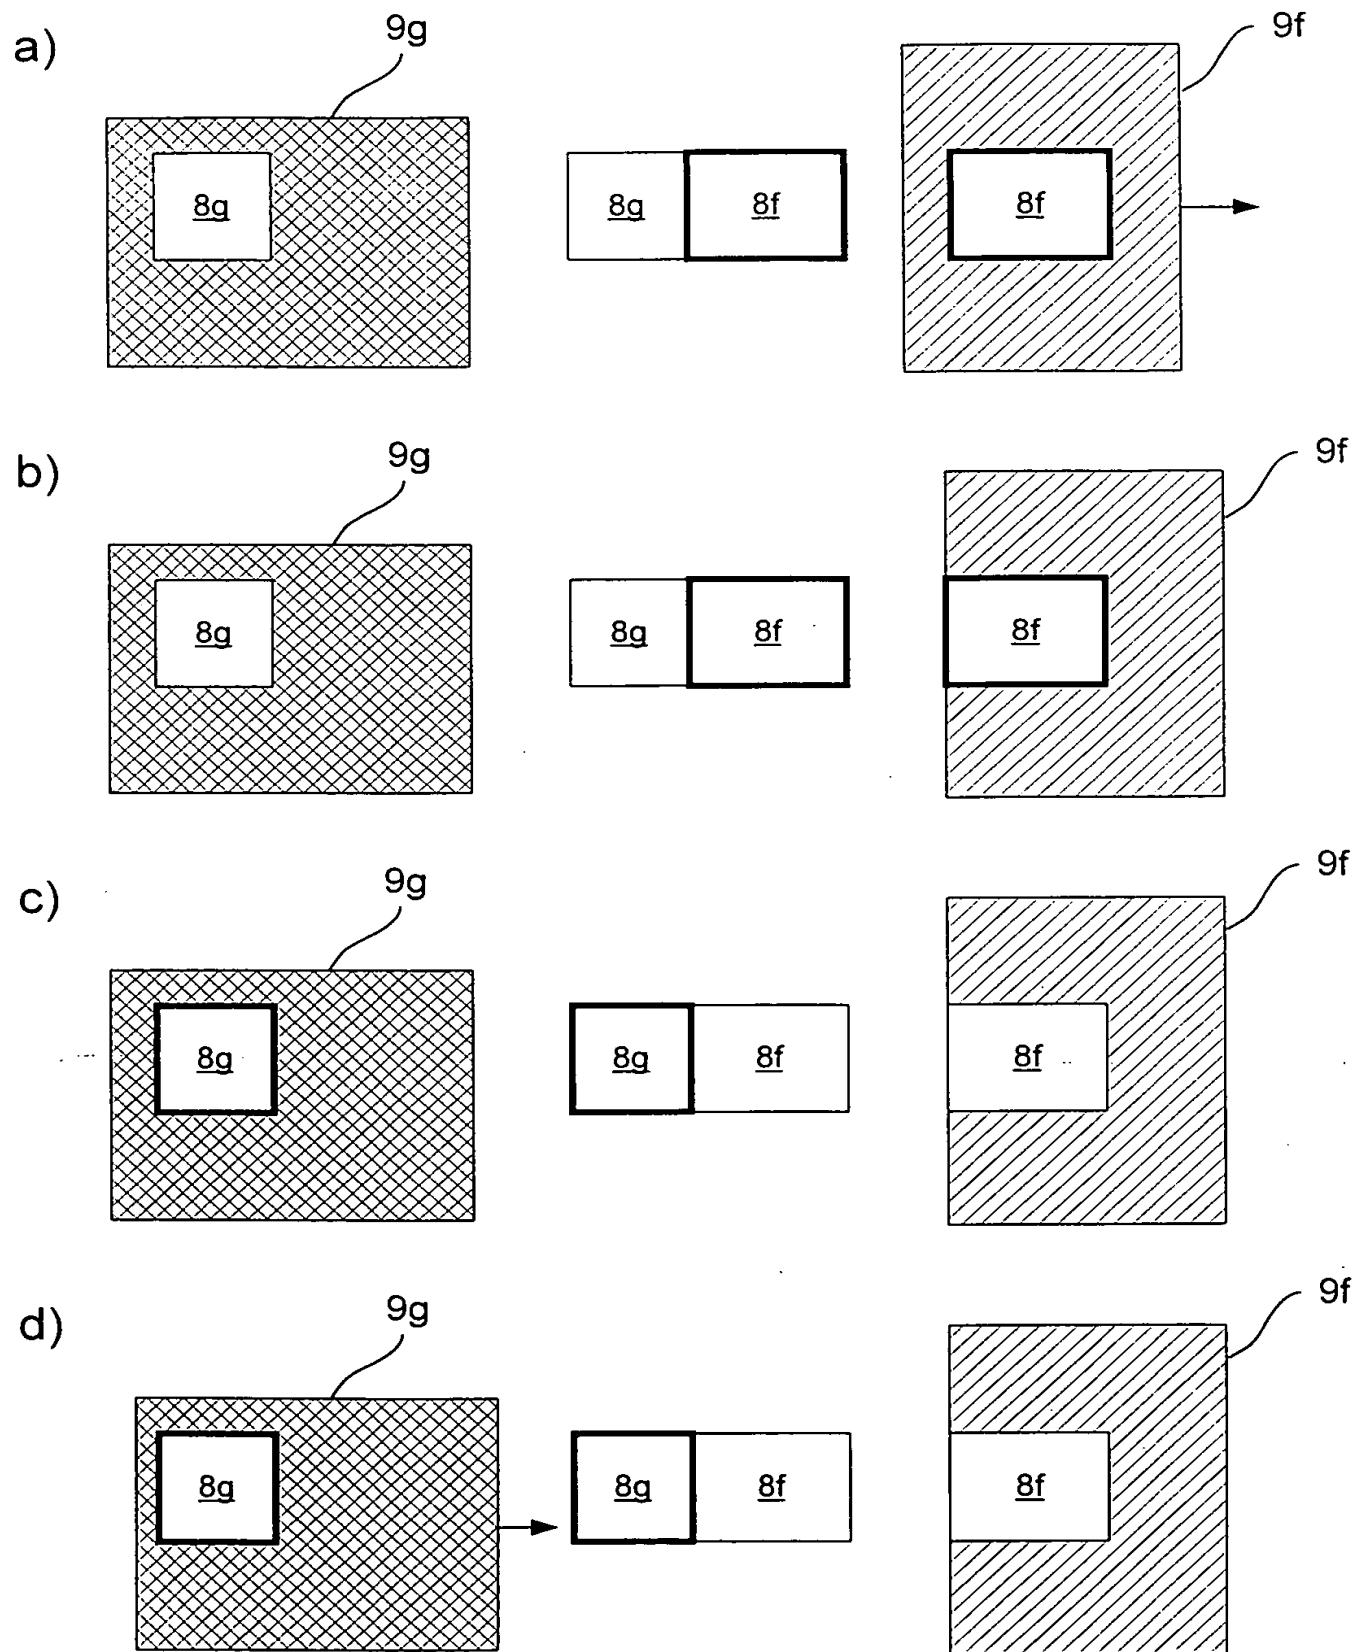


Figure 19

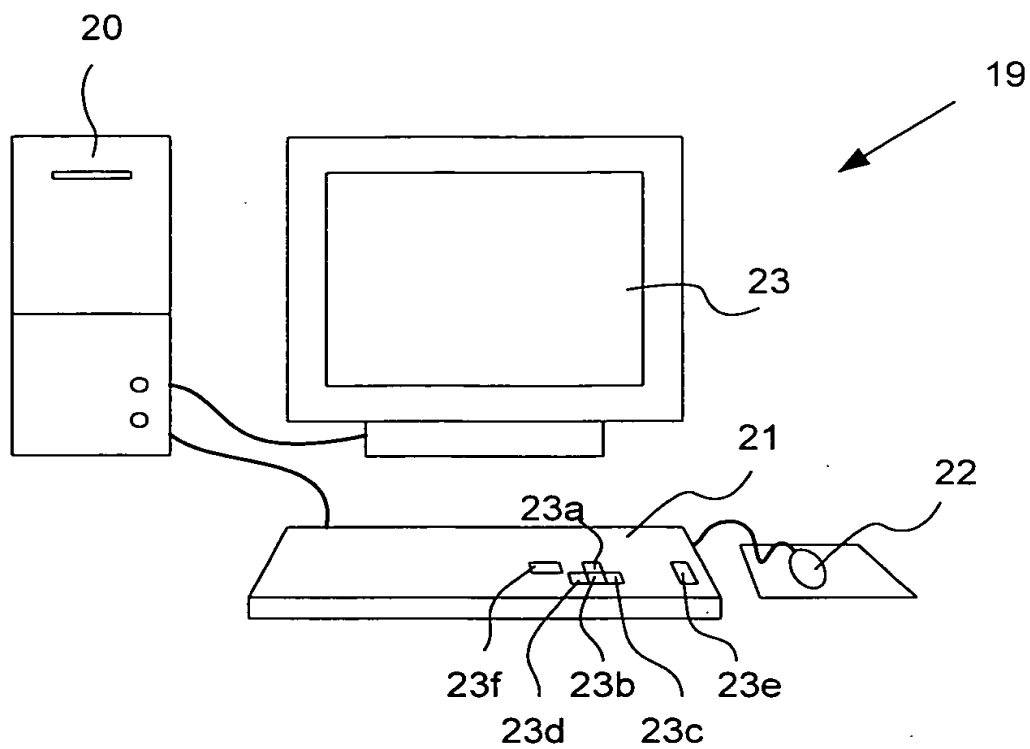


Figure 20

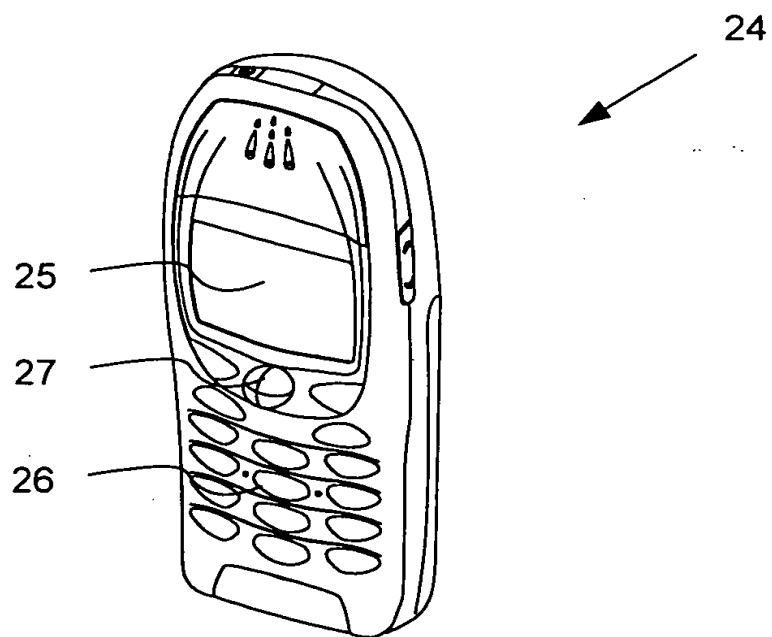


Figure 21